


CDP-CX270

200-DISC MEGASTORAGE CD CHANGER

- INTERNAL STORAGE FOR 200 DISCS
- 400 CD MASTER CONTROL WITH A SECOND 200-CD CHANGER
- MENUS AND CHOICES ON YOUR TELEVISION SCREEN
- CD TEXT AUTOMATIC DISPLAY OF DISC AND TRACK NAMES WITH COMPATIBLE CDS
- KEYBOARD INPUT FOR CONVENIENT ENTRY OF DISC AND TRACK TITLES
- CUSTOM FILE™ MEMORY STORES DISC AND TRACK TITLES FOR ALL 200 CDS
- S-LINK INTERFACE WITH SONY A/V EQUIPMENT
- JOG DIAL FOR RAPID SELECTION OF DISCS OR MEMO INFORMATION

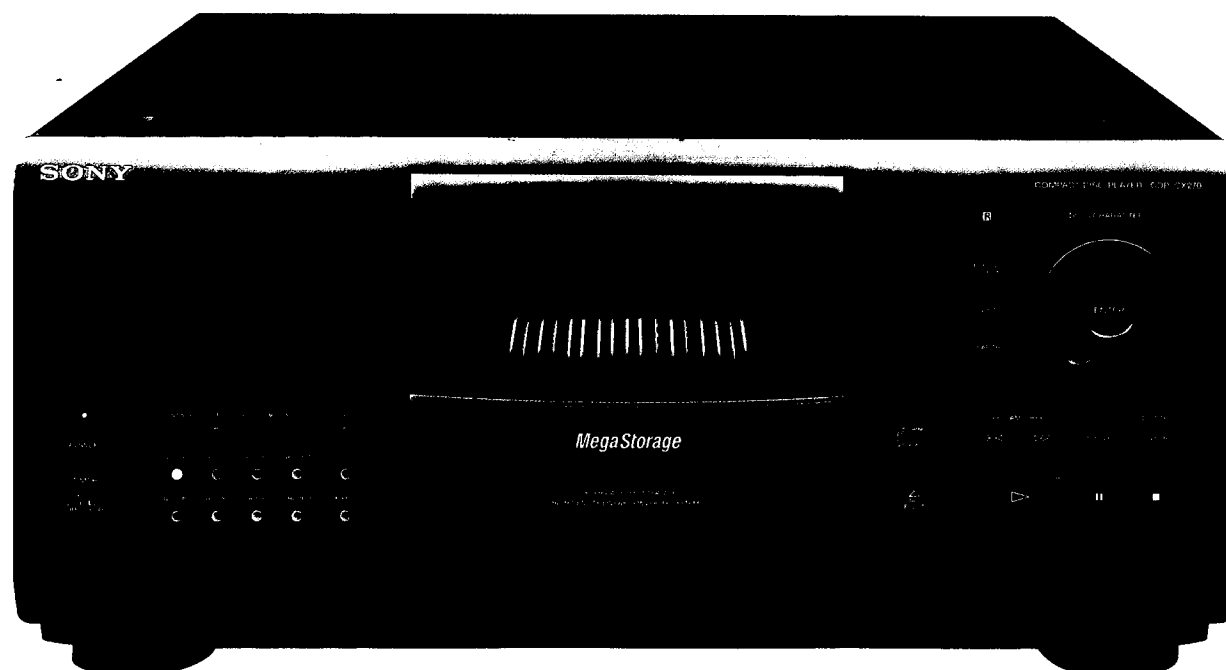

CDP-CX270

Let's say you're in the mood for some music. Instead of thumbing through a shelf of CDs, You park yourself in front of your A/V system and look at your TV screen. There you see a listing of your entire music collection. When you see the disc and song you want, simply hit a remote button and the music begins! It isn't fantasy. It's reality with Sony's 200-CD changer—the CDP-CX270—connected to your television and a compatible Sony Receiver!

FEATURES

- **INTERNAL STORAGE FOR 200 DISCS** means you may never need to open another CD jewel box
- **400 DISC MASTER CONTROL** enables you to daisy chain a second 200-CD changer (Sony CDP-CX270, CX250, CX200 or CX90ES) and operate them as one!
- **ON-SCREEN DISPLAY** of disc and track titles, when connected to a television; simply the easiest, most luxurious, most enjoyable way to select and play music!
- **S-LINK CONNECTOR** for enriched disc and track title communication with a Sony STR-DE1015G, DE915, DE815G, DE715, D905G or D805G Receiver.
- **KEYBOARD INPUT** makes it easy to enter disc titles; works with IBM® compatible PC keyboards
- **CUSTOM FILE GROUP FILE** lets you designate 8 different types of music for classifying all 200 discs; group names might be ROCK, CLASSICAL, KEVIN or DAD and a single disc can belong to more than one group
- **CUSTOM FILE DISC MEMO** lets you assign a 13-character name to all 200 discs; names are displayed on the front panel and rapidly flash by in Memo Scan as the disc tray turns
- **CUSTOM FILE TRACK MEMO** lets you assign a 13-character name to tracks on your discs, so you'll always know exactly what's available and what's playing
- **CUSTOM FILE DELETE BANK** remembers to skip the songs you find boring on all 200 discs; can be switched off for playback of complete discs
- **CD TEXT** automatic display of disc and track names with a new generation of compatible CDs; automatically enters Custom File memory without typing
- **FRONT PANEL JOG DIAL** rotates through the 200 discs and also rotates through the alphabet for storing disc, track and Group File names
- **PULSE D/A CONVERTER** minimizes zero-cross distortion, considered by researchers to be the most audible distortion in CD players; the result is remarkably smooth, open sound—even during delicate quiet passages
- **8X OVERSAMPLING DIGITAL FILTER** for better stereo imaging, greater accuracy
- **HYBRID CONVERTER DESIGN** places the digital filter and D/A converter on a single IC chip for shorter signal paths
- **DIRECT DIGITAL SYNC™** circuitry minimizes the time-base errors called "jitter" for cleaner, more transparent musical frequencies
- **DIGITAL SERVO CONTROL** of tracking, laser focus and disc rotation permits higher precision, lower radiated noise
- **OPTICAL DIGITAL OUTPUT** for pure, digital-to-digital connection to an MD Recorder, DAT Recorder or DSP Receiver
- **REMOTE COMMANDER®** wireless remote control with Jog Dial and 10-key Direct Access track, disc and group selection; remote programming
- **MULTI-DISC 32-TRACK PROGRAMMING** with three programming modes plays up to 32 songs in any sequence you choose, from any of the 200 discs you choose
- **CROSS-FADE** between selections on daisy-chained CD changers, for dance parties, dramatic special effects
- **FIVE PLAY MODES** (Continue 1 or All Discs, Shuffle All Discs, Delete, Program)
- **THREE REPEAT MODES** (One or All Discs, One Track)
- **TIMER SWITCH**
- **INFORMATIVE, DOT-MATRIX DISPLAY**
- **FLAT TOP PLATE** enables other components to be stacked with the Changer

SPECIFICATIONS

FREQUENCY RESPONSE: 2 - 20,000Hz, ± 0.3 dB
HARMONIC DISTORTION: <0.0027%
SIGNAL-TO-NOISE RATIO: >110dB
DYNAMIC RANGE: >99dB
CHANNEL SEPARATION: >105dB
LINE OUTPUT: 2V, 50 kohms
POWER REQUIREMENTS: AC 120V, 60Hz
POWER CONSUMPTION: 15W
DIMENSIONS (WHD): 17" x 7 7/8" x 19"
WEIGHT: 20 lbs

©1997 Sony Electronics Inc.

Reproduction in whole or in part without written permission is prohibited. All rights reserved. Sony, Custom File, Digital Sync, Direct Access and Remote Commander and S-Link are trademarks of Sony. IBM is a trademark of International Business Machines Corporation. Features and specifications are subject to change without notice. Non-metric weights and measures are approximate.

SONY

Sony Electronics Inc.
1 Sony Drive
Park Ridge, New Jersey 07656
<http://www.sony.com>

Printed in USA 1/97