


MDS-JE700

MINIDISC RECORDER

- RECORDS UP TO 74 MINUTES OF DIGITAL AUDIO ONTO
A 2-1/2 INCH DIAMETER DISC¹
- MONAURAL RECORDING FOR LONGER RECORDING TIME
- UN-DO EDITING FUNCTION
- A-B ERASE FUNCTION
- CONVENIENT JOG DIAL FOR TRACK SELECTION, TEXT ENTRY
- SAMPLING RATE CONVERTER
- 20 BIT ANALOG TO DIGITAL CONVERTER
- ▲ S-LINK™ INTERFACE
- ▲ ALUMINUM FRONT PANEL
- ▲ 2 OPTICAL AND 1 COAXIAL DIGITAL INPUTS
- ▲ DATE/TIME RECORDING
- ▲ CURRENT PULSE D/A CONVERTER
- ▲ R-CORE TRANSFORMER
- ▲ HEAVY-GAUGE AC POWER CORD
- REMOTE COMMANDER® REMOTE CONTROL
- ▲ CD CUSTOM FILE™ TEXT TRANSFER

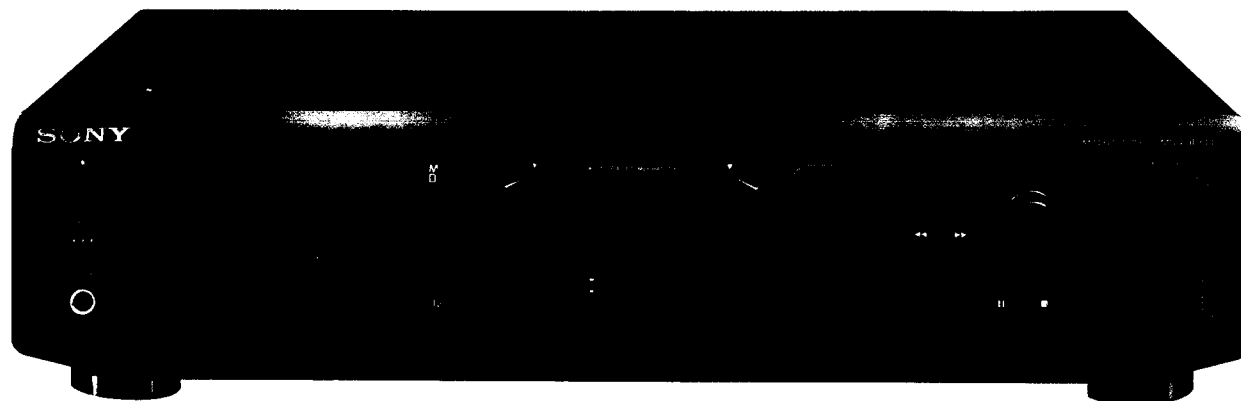

- ▲ STEP UP FEATURE

MDS-JE700

MiniDisc—that digital, recordable, optical phenomenon—takes on new sophistication with the Sony MDS-JE700. You'll find amazing new non-linear editing capabilities. And you'll hear new sonic smoothness. Wide Bit Stream signal processing, an exceptional Current Pulse D/A converter and a 20-bit A/D Converter all raise the standard of MiniDisc sound.

FEATURES

- **MONAURAL RECORDING FOR EXTENDED TIME** up to 148 minutes (mono), up to 74 minutes (stereo)
- **CENTER-MOUNT MECHANISM** reduces vibration, minimizes internal radiation and hum
- **UN-DO EDITING** lets you reverse your last Move, Erase or Combine edit; available until you eject the disc or record over your work
- **A-B ERASE FUNCTION** is ideal for deleting interruptions like radio commercials
- **OVERWRITE FUNCTION** lets you record over an existing track without erasing the entire disc
- **TIME SHIFT RECORDING** actually captures music to disc two full seconds before you press the Record button; perfect for recording live events or radio broadcasts
- ▲ **CD CUSTOM FILE TEXT TRANSFER** automatically records the disc name and track titles from a CD Player with Sony Custom File Disc Memo and S-Link™ interface
- ▲ **S-LINK™ INTERFACE** for advanced operation with compatible Sony Receivers and CD Players
- ▲ **ALUMINUM FRONT PANEL** resists resonance
- ▲ **2 OPTICAL AND 1 COAXIAL DIGITAL INPUTS**
- ▲ **DATE/TIME STAMP** marks your recordings, for reference
- **CONVENIENT JOG DIAL** for Split-second track access; text entry
- **SAMPLING RATE CONVERTER** for digital-to-digital recordings from DAT
- **WIDE BIT STREAM TECHNOLOGY** maintains 20-bit precision through the recording process, for clearer reproduction of delicate, low-level music
- **20 BIT ANALOG TO DIGITAL CONVERTER** for superb precision with Wide Bit Stream technology
- **FOURTH-GENERATION ATRAC CIRCUITRY** for smoother, more clearly delineated sound; ATRAC enables you to capture 74 minutes of digital audio on a 2-1/2 inch diameter disc
- **8X OVERSAMPLING PLAYBACK DIGITAL FILTER** for better stereo imaging, greater accuracy

- ▲ **CURRENT PULSE D/A CONVERTER** uses highly accurate current source for greater precision than voltage sources, greater immunity to power supply voltage fluctuations
- ▲ **R-CORE POWER TRANSFORMER** vastly reduces radiated hum
- **ANTI-RESONANT INSULATOR FEET** with off-center holes to minimize resonance
- **SHOCK RESISTANT MEMORY (SRM)** buffer holds up to 10 seconds of music for uninterrupted playback, even when accidentally bumped
- **NON-LINEAR RECORDING AND PLAYBACK** like a CD, allows instant playback at the push of a button; you can also record without searching for the end of the recorded section—the deck automatically finds blank spots on the disc and records onto them without interruption
- **DIGITAL PEAK METERS**
- **25-STEP PROGRAMMING**
- **SHUFFLE PLAY**
- **3 PLAY MODES; 3 REPEAT MODES**
- **TEXT DISPLAY** for prerecorded MiniDiscs
- **TEXT ENTRY** for recordable MiniDiscs
- **POWERFUL EDITING** features: Erase One, Erase All, Combine, Divide, Un-do, Record from end, Record Over, and Move tracks; a MiniDisc can be recorded and re-recorded over one million times
- **SMART SPACE**
- **CD SYNCHRO RECORD**
- **REMOTE COMMANDER® REMOTE CONTROL**
- ▲ **HEAVY GAUGE AC POWER CORD**

SPECIFICATIONS

FORMAT: MiniDisc digital audio system

RECORD/PLAYBACK TIME: Max. 74 minutes with Sony MDW-74 Recordable MiniDisc

SAMPLING FREQUENCY: 44.1kHz

FREQUENCY RESPONSE: 5 - 20,000Hz ±0.3dB

SIGNAL-TO-NOISE RATIO: more than 100dB

WOW & FLUTTER: Unmeasurable

INPUTS: Line: Phono jacks

Optical: Square optical jack

Coaxial: F connector

OUTPUTS: Line: Phono jacks

Optical: Square optical

Headphone: Stereo Phone jack

DIMENSIONS (WHD): 17" x 4 1/4" x 12 3/8"

WEIGHT: 9 lbs 11 oz

©1997 Sony Electronics Inc.

Reproduction in whole or in part without written permission is prohibited. All rights reserved. Sony, Custom File, Remote Commander, S-Link and the MiniDisc logo are trademarks of Sony. Features and specifications are subject to change without notice. Non-metric weights and measures are approximate.

*MiniDisc products sold by manufacturer-authorized outlets incorporate the Serial Copy Management System, which will not prevent you from making a direct digital-to-digital copy from a digital source, but from such copies will prevent a second direct digital-to-digital copy from being made.

SONY

Sony Electronics Inc.
1 Sony Drive
Park Ridge, New Jersey 07656
<http://www.sony.com>

Printed in USA 1/97