


**SONY**

# **SA-W10**

## **POWERED SUBWOOFER**

- **BUILT-IN AMPLIFIER WITH 23 WATTS X1,  
INTO 8 OHMS FROM 20HZ TO 20,000HZ AT 0.1% THD**
- **6 1/4-INCH DRIVER**
- **BASS REFLEX ENCLOSURE**
- **LINE-LEVEL AND SPEAKER LEVEL INPUTS**
- **BUILT-IN HIGH-CUT FILTER, VARIABLE FROM 50 TO 200HZ**

**FEATURES AND  
SPECIFICATIONS  
SUBJECT TO CHANGE  
WITHOUT NOTICE**

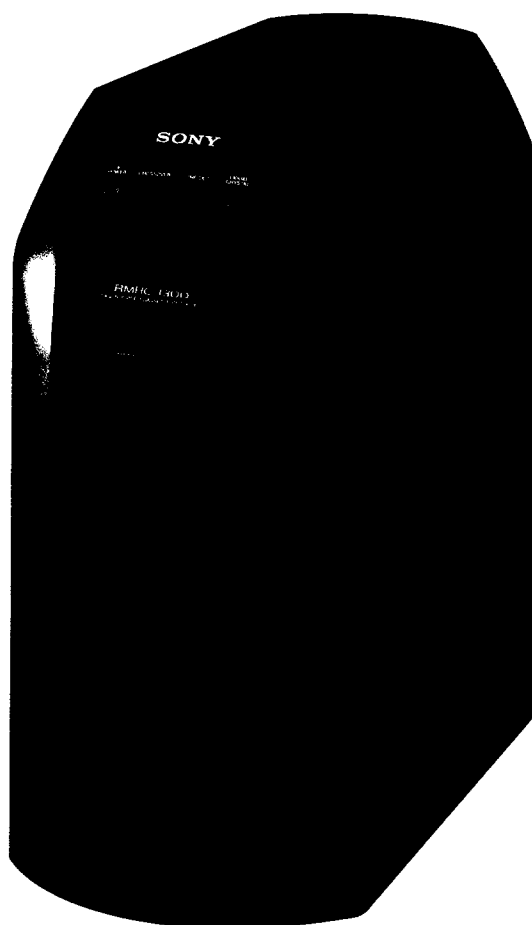

## SA-W10

Bookshelf systems, mini systems, "satellite" speakers and even televisions have their charms. But they all can use help reproducing the deepest octaves of bass. And that's where the Sony SA-W10 comes in. This powered subwoofer includes everything you need to add the thrill of deep bass. So you can hear the thunder of movie sound tracks. The bass guitar in a rock band. Or the bass fundamentals in a Brahms symphony.

## FEATURES

- **BUILT-IN AMPLIFIER** with 23 watts x1, into 8 ohms from 20Hz to 20,000Hz at 0.1% THD
- **BASS REFLEX ENCLOSURE** uses the woofer's back-pressure inside the cabinet to reinforce deep bass sound; helps produce higher bass output for each Watt of power
- **6 1/4-INCH LONG-THROW DRIVER** for deep, powerful bass
- **BUILT-IN HIGH-CUT FILTER** enables you to connect standard, full-range stereo inputs; you can use the SA-W10 even if your system doesn't have a "Subwoofer" output; filter cutoff adjustable from 50 to 200Hz
- **LINE-LEVEL AND SPEAKER-LEVEL INPUTS** accommodate the widest variety of source components, including stereo systems, televisions and more
- **OMNI-DIRECTIONAL BASS** enables one subwoofer to handle the deep bass for both left and right channels.
- **PHASE INVERT SWITCH** makes it easy to match the subwoofer and the main speakers for maximum bass
- **MAGNETICALLY SHIELDED** for placement near a television screen; minimizes magnetic fields that might interfere with the television picture

## SPECIFICATIONS

**POWER OUTPUT:** 23W x1, into 8 ohms from 20Hz to 20,000Hz at 0.1% THD  
**DRIVE UNIT:** 6 1/4 inch cone  
**FREQUENCY RESPONSE:** 28 - 200Hz  
**LINE INPUT:** L/R phono jacks  
**SPEAKER-LEVEL INPUT:** Speaker terminals  
**LINE INPUT LEVEL AND IMPEDANCE:** 200mV, 33kohms  
**HIGH CUT FILTER:** Adjustable from 50Hz to 200Hz  
**POWER REQUIREMENTS:** AC 120V, 60Hz  
**POWER CONSUMPTION:** 30W  
**DIMENSIONS (WHD):** 8" x 16 1/8" x 14 3/4"  
**WEIGHT:** 17 lbs 10 oz

©1996 Sony Electronics Inc.

Reproduction in whole or in part without written permission is prohibited. All rights reserved. Features and specifications are subject to change without notice. Non-metric weights and measures are approximate.

Sony is a trademark of Sony.

# SONY®

Sony Electronics Inc.  
1 Sony Drive  
Park Ridge, New Jersey 07656  
<http://www.sony.com>

Printed in USA 2/96